Distributed by:

JAMECO® ELECTRONICS

www.Jameco.com ✦ 1-800-831-4242

The content and copyrights of the attached material are the property of its owner.

Jameco Part Number 196171

REVISIONS		
REV	DESCRIPTION	DATE
A	RELEASED FOR PRODUCTION	2/1/99

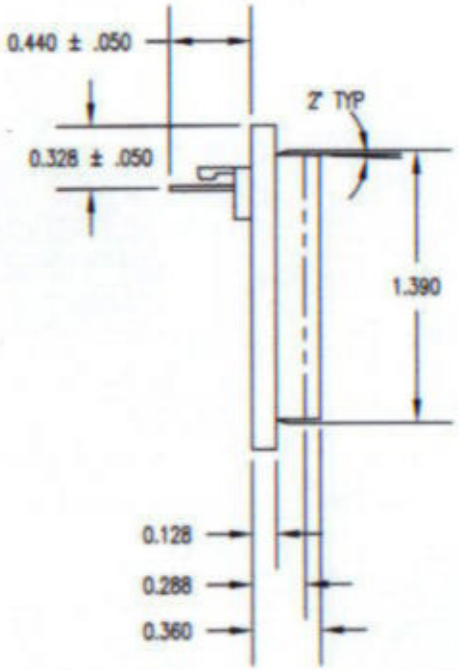

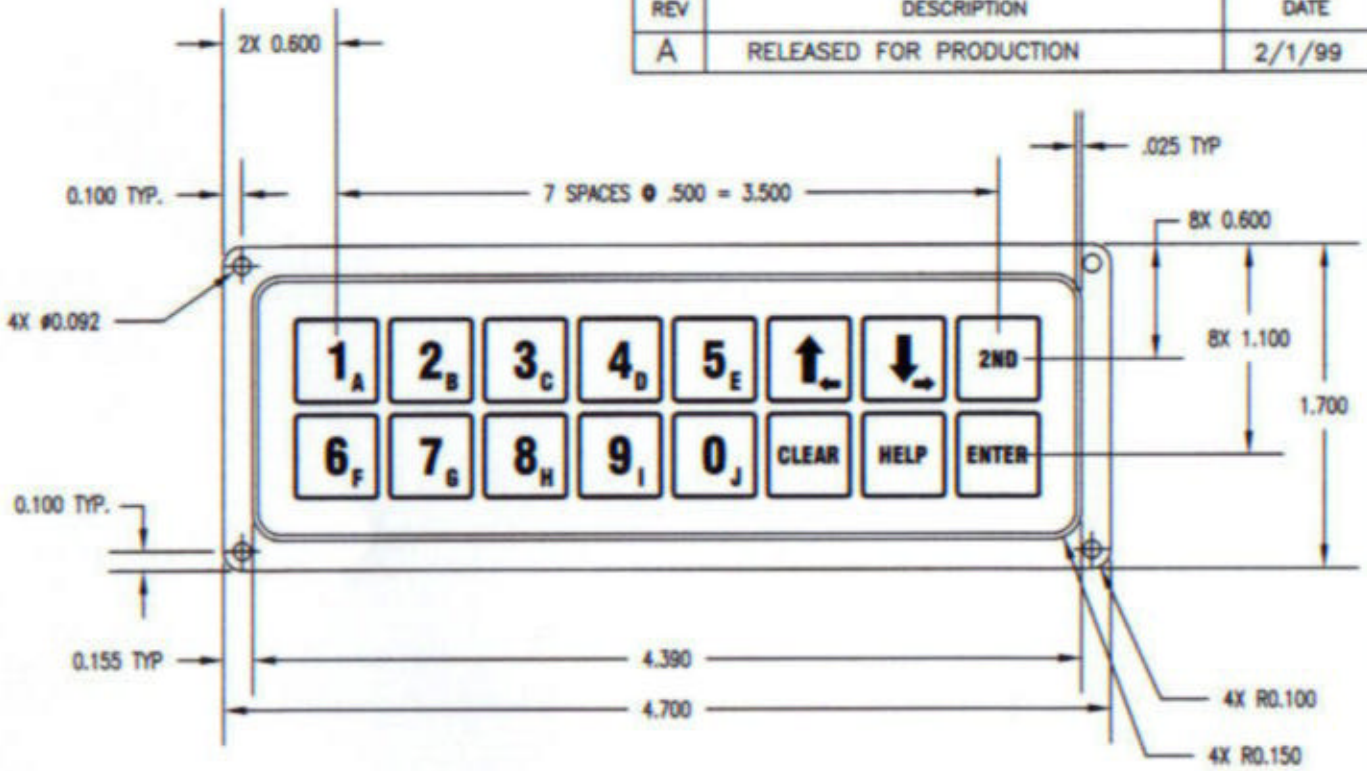

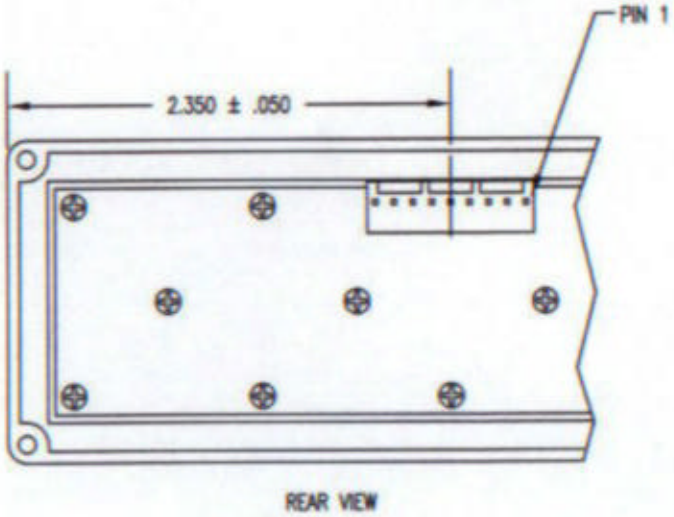

REAR VIEW

ELECTRICAL SCHEMATIC

KEY DESIGNATION	CONNECTOR PINS
1A	1 & 5
2B	1 & 6
3C	1 & 7
4D	2 & 5
5E	2 & 6
↑	1 & 8
↓	2 & 8
2ND	3 & 8
6F	2 & 7
7G	3 & 5
8H	3 & 6
9I	3 & 7
0J	4 & 6
CLEAR	4 & 5
HELP	4 & 7
ENTER	4 & 8
ESD SHIELD	9

NOTES:
1. TOLERANCES: ±.015 UNLESS NOTED OTHERWISE.
2. BEZEL: BLACK ABS.
3. KEYS TO HAVE TACTILE SNAP USING METAL SNAP DOMES.
4. PCB: .031 THICK FR-4, DOUBLE-SIDED, GOLD PLATED
5. CONNECTOR: 9 PIN, TIN PLATED, .025 SQ. ON .100 CENTERS, SHROUDED STYLE, ACT P/N CONN-07-30009-000.
6. OVERLAY PRINTED GRAPHICS: STANDARD GRAPHICS (4 COLORS), PER ACT ARTWORK #ART-07-30009-000.
7. METAL ESD SHIELD: STANDARD, INSTALLED BETWEEN PCB AND BEZEL.
8. PCB CIRCUITRY: ACT P/N CIR-07-30009-000.
9. OVERLAY KEY POSITIONS ARE PILLOW EMBOSSED.

UNLESS OTHERWISE SPECIFIED,DIMENSIONS ARE IN INCHES.

SIZE		DWG. NO.	REV.
A	STANDARD 2 X 8 KEYBOARD ASSEMBLY	ACT-07-30009-000	A
SCALE FULL	DO NOT SCALE DRAWING	SHEET 1 OF 1	